



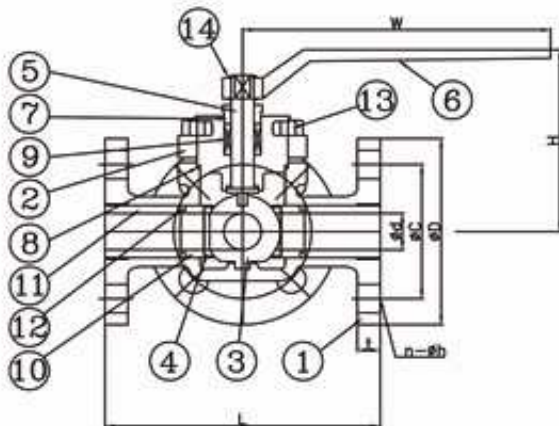


RATING	PSI	Kgf/cm ²
BODY	107 PSI	7.5 Kgf/cm ²
SEAT	78 PSI	5.5 Kgf/cm ²

RATING	PSI	Kgf/cm ²
BODY	341 PSI	24 Kgf/cm ²
SEAT	250 PSI	17.6 Kgf/cm ²

RATING	PSI	Kgf/cm ²
BODY	213 PSI	15 Kgf/cm ²
SEAT	156 PSI	11 Kgf/cm ²

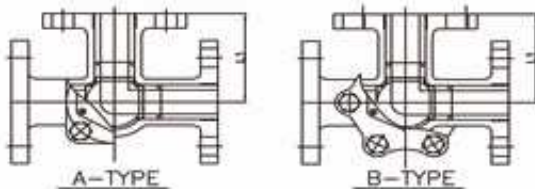

- NOTE -

- AIR TEST INSPECTION : 6 Kg/Cm²
- Max Allowable Temp : Teflon-160°C
- 15A~65A ----- A-TYPE
- 80A~150A ----- B-TYPE
- 65A~100A ----- SC480

Part No.	Part Name	Material	Material
14	STOP RING	SUP	SUP
13	HEXAGON BOLT	SUS304	S45C
12	O-RING	NBR	NBR
11	BUSHING	C3771BD	SS41
10	ADAPTER	C3771BD	C3771BD
9	V-PACKING	TEFLON	TEFLON
8	PACKING	TEFLON	TEFLON
7	GLAND	SCS13	SCS13
6	LEVER	SS400	SS400
5	STEM	SUS304	SUS304
4	SEAT RING	TEFLON	TEFLON
3	BALL	SCS13	SCS13
2	CAP	BC6	SC480
1	BODY	BC6	SC480

DIMENSION

(Unit:mm)

SIZE	ød	FLANGE 5Kg/Cm ²		FF	L	L1	H	W	WT(Kg)/EA	
		øD	t							
15A	15	80	9	60	4-12	110	60	125	120	18.5
25A	25	95	10	75	4-12	180	90	125	155	18.5
40A	40	120	12	95	4-15	180	90	140	210	33.8
50A	50	130	14	105	4-15	250	125	155	210	34.7
65A	65	155	14	130	4-15	220	110	230	280	47.4
80A	80	180	14	145	4-19	320	160	230	320	64.5
100A	100	200	16	165	8-19	370	185	250	400	84.3

SIZE	ød	FLANGE 10Kg/Cm ²		FF	L	L1	H	W	WT(Kg)/EA	
		øD	t							
15A	15	95	12	70	4-15	130	65	125	120	19
25A	25	125	14	90	4-19	180	90	125	155	19
40A	40	140	16	105	4-19	190	95	140	210	34.4
50A	50	155	16	120	4-19	250	125	155	210	35.5
65A	65	175	18	140	4-19	270	135	230	280	48.8
80A	80	185	18	150	8-19	320	160	230	320	65.5
100A	100	210	18	175	8-19	370	185	250	400	85.5