


RATING	5Kgf/cm ²	16Kgf/cm ²
BODY	10.5	33.0
SEAT	7.7	24.2
CHECK	7.7 → 4.0	24.2 → 4.0

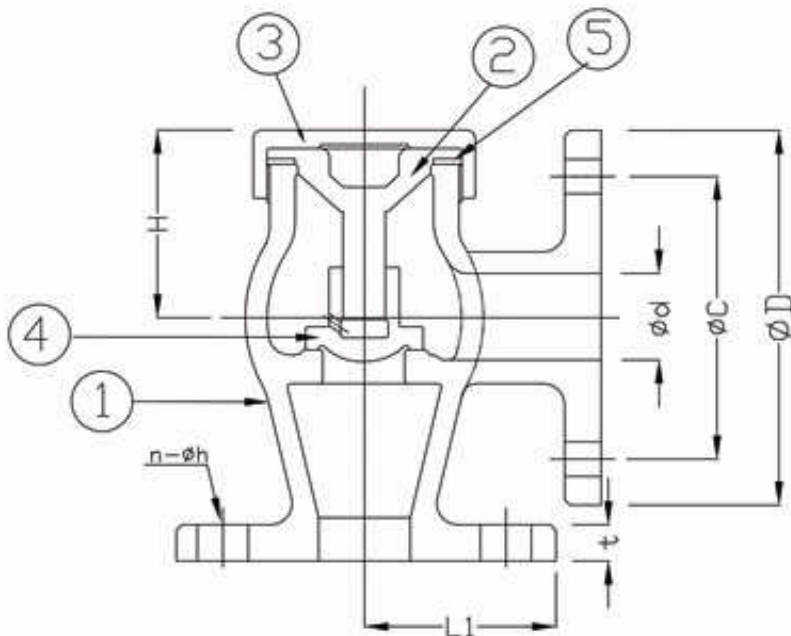

5	Gasket	JIS F 7102
4	Disc	JIS H 5111 -BC 6 or
3	Bonnet	JIS H 3250 -C3771BD or
2	Disc guide	C3771BE
1	Body	JIS H 5111 -BC 6

DIMENSIONS (5K:F7416, 16K:F7418)
UNIT : mm

SIZE	ød	L1		5K FLANGE				16K FLANGE				H	WEIGHT (Kg)	
		5K	16K	øD	øC	t	n-øh	øD	øC	t	n-øh		5K	16K
15A	15	55	70	80	60	9	4-12	95	70	12	4-15	56	1.57	2.36
20A	20	60	75	85	65	10	4-12	100	75	14	4-15	59	2.07	3.01
25A	25	65	85	95	75	10	4-12	125	90	14	4-19	67	2.65	4.36
32A	32	80	95	115	90	12	4-15	135	100	16	4-19	65	3.68	5.67
40A	40	85	100	120	95	12	4-15	140	105	16	4-19	69	4.95	7.12


CAST IRON LIFT ANGLE CHECK VALVE 5K & 10K

RATING	Kgf/cm ²	MPa
BODY	10.5 Kgf/cm ²	1.05 MPa
SEAT	7.7 to 4 Kgf/cm ²	0.77 MPa to 1.4 MPa

RATING	Kgf/cm ²	PSI
BODY	21 Kgf/cm ²	298 PSI
SEAT	15.4 Kgf/cm ²	219 PSI



IMAGE IS BEING UPGRADED

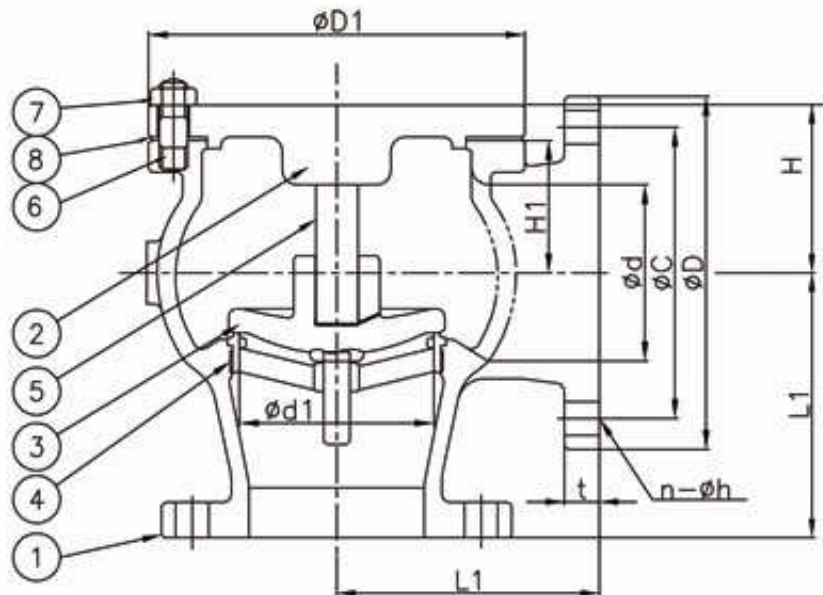

8	Gasket	JIS F 7102
7	Hexagon nut	JIS G 3101-SS400
6	Stud	JIS H 3250-C37718Dor BE
5	Disc Guide Bush	JIS H 5111-BC6
4	Valve seat	JIS G 5501-FC200
3	Disc	
2	Bonnet	
1	Body	

DIMENSION

(UNIT :mm)

SIZE	ød	FLANGE JIS 5K FF				L1	H	H1	øD1
		øD	t	øC	n-øh				
50A	50	130	16	105	4-15	100	77	60	140
65A	65	155	18	130	4-15	115	81	62	160
80A	80	180	18	145	4-19	130	84	65	190
100A	100	200	20	165	8-19	150	96	75	215
125A	125	235	20	200	8-19	170	108	85	245
150A	150	265	22	230	8-19	190	125	100	270
200A	200	320	24	280	8-23	220	157	130	335

SIZE	ød	FLANGE JIS10K FF				L1	H	H1	ød1
		øD	t	øC	n-øh				
50A	50	155	20	120	4-19	120	255	65	58
65A	65	175	22	140	4-19	130	260	62	73
80A	80	185	22	150	8-19	140	270	65	88
100A	100	210	24	175	8-19	160	305	75	111
125A	125	250	24	210	8-23	180	350	90	138
150A	150	280	26	240	8-23	205	390	105	163
200A	200	330	26	290	12-23	230	450	130	213