


RATING	5Kgf/cm ²	16Kgf/cm ²
BODY	10.5	33.0
SEAT	7.7	24.2
CHECK	7.7 → 4.0	24.2 → 4.0

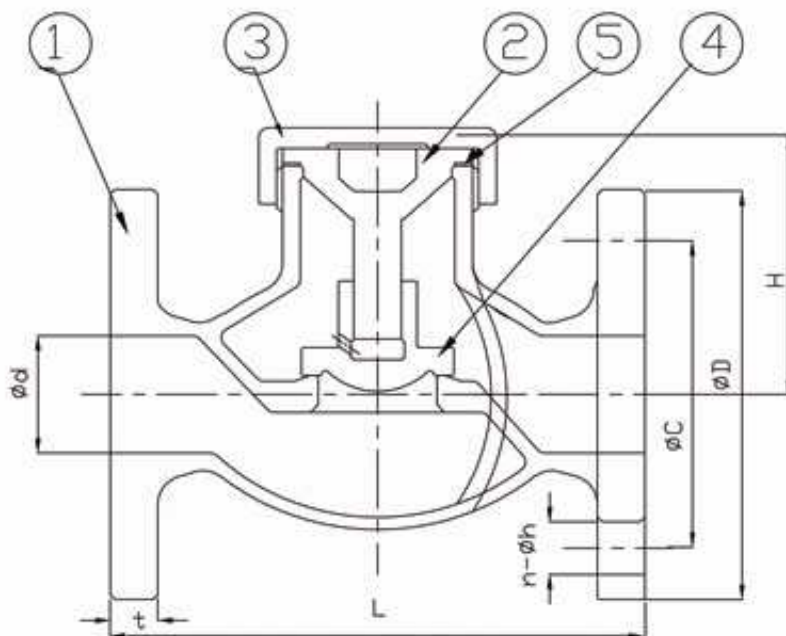

5	Gasket	JIS F 7102
4	Disc	JIS H 5111 -BC 6
3	Bonnet	
2	Disc guide	
1	Body	

DIMENSIONS (5K:F7415, 16K:F7417)
UNIT : mm


SIZE	ϕd	L		5K FLANGE				16K FLANGE				H	WEIGHT (kg)	
		5K	16K	ϕD	ϕC	t	n- ϕh	ϕD	ϕC	t	n- ϕh		5K	16K
15A	15	100	110	80	60	9	4-12	95	70	12	4-15	66	1.62	2.37
20A	20	110	120	85	65	10	4-12	100	75	14	4-15	71	2.17	3.05
25A	25	120	130	95	75	10	4-12	125	90	14	4-19	81	2.80	4.42
32A	32	140	160	115	90	12	4-15	135	100	16	4-19	83	3.92	5.87
40A	40	160	180	120	95	12	4-15	140	105	16	4-19	91	5.49	7.67

CAST IRON LIFT GLOBE CHECK VALVE 5K

RATING	BODY	SEAT
Kgf/cm ²	10.5 Kgf/cm ²	7.7 Kgf/cm ²



IMAGE IS BEING UPGRADED

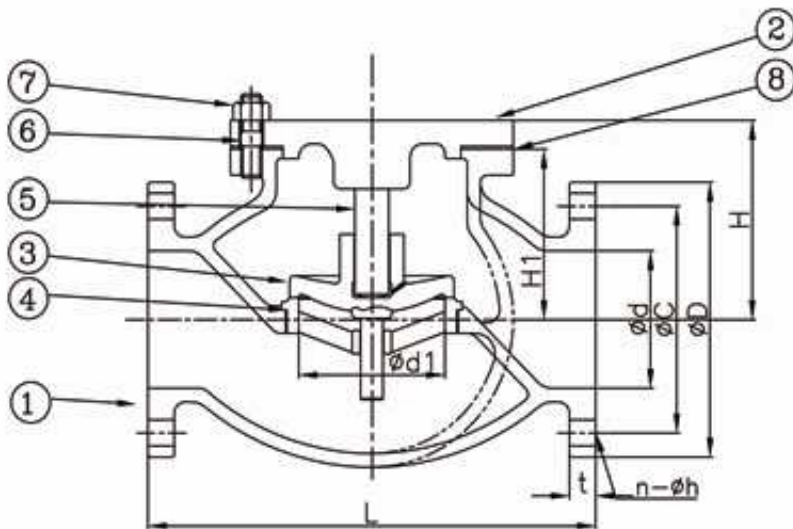

8	GASKET	JIS F 7102
7	HEXAGON NUT	JIS G 3101-SS400
6	STUD	
5	BUSH	JIS H 5111-BC 6
4	VALVE SEAT	
3	DISC	JIS G 5501-FC200
2	BONNET	
1	BODY	

DIMENSION
(Unit:mm)

SIZE	ød	FLANGE JIS5K FF'				L	H	H1
		øD	t	øC	n-øh			
50A	50	130	16	105	4-15	210	107	90
65A	65	155	18	130	4-15	250	124	105
80A	80	180	18	145	4-19	280	129	110
100A	100	200	20	165	8-19	340	146	125
125A	125	235	20	200	8-19	410	166	145
150A	150	265	22	230	8-19	480	188	165