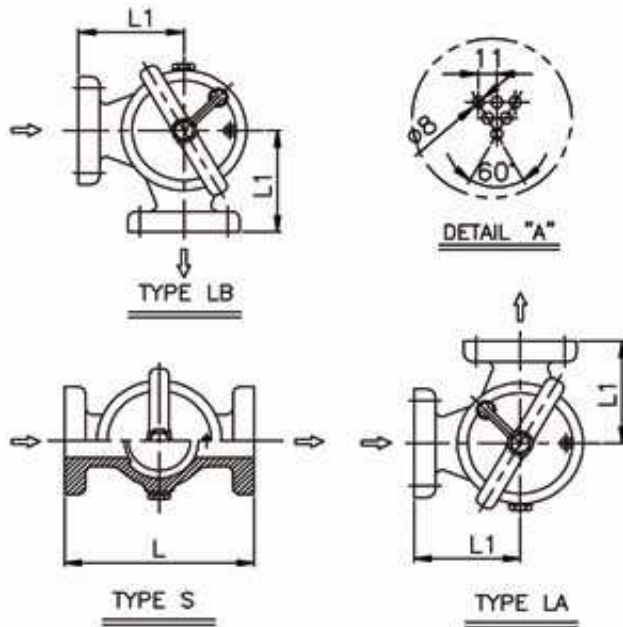
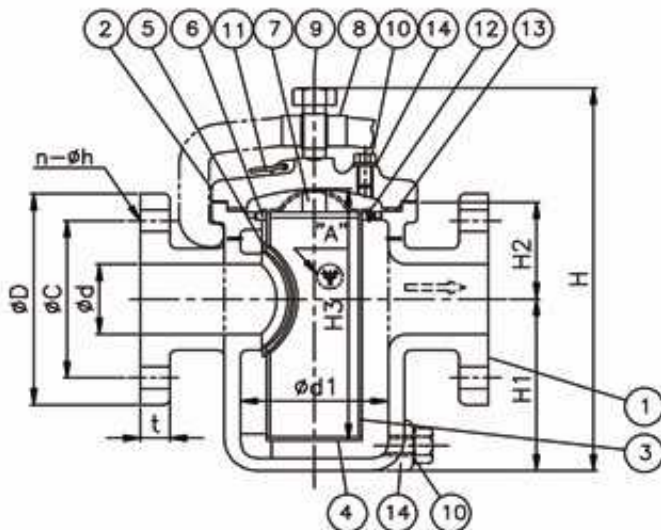


RATING	Kgf/cm ²	PSI
BODY	3 Kgf/cm ²	43 PSI


NOTE

 1. INSIDE : TAR EPOXY (MIN. 250 μ)

14	GASKET	JIS F7102
13	SET SCREW	JIS G 4303-SUS420J1
12	HANDLE OF COVER	JIS G 3101-SS400
11	PLUG	JIS H 3250-C3771BD
10	PUSHING BOLT	JIS H 3250-C3771BD
9	COVER PUSHER	JIS G 5101-SC480
8	HANDLE OF STRAINER	JIS G 4801-SUP3
7	LINER	JIS G 3101-SS400
6	SWORD OF STRAINER CYLINDER	
5	BOTTOM PLATE	
4	STRAINER CYLINDER	JIS G 5501-FC200
3	COVER	
2	BODY	


DIMENSION

(Unit:mm)

SIZE	ϕd	FLANGE JIS5K FF				L	L1	H	H1	H2	H3	$\phi d1$
		ϕD	ϕC	$n-\phi h$	t							
25A	25	95	75	4-12	14	170	85	180	75	34.5	100	70
32A	32	115	90	4-15	16	190	95	215	85	42	119	85
40A	40	120	95	4-15	16	190	95	215	85	42	119	85
50A	50	130	105	4-15	16	200	100	240	100	49	140	95
65A	65	155	130	4-15	18	250	125	305	135	59	184	130
80A	80	180	145	4-19	18	270	135	340	152	68	209	145
100A	100	200	165	8-19	20	320	160	400	185	80	251	175
125A	125	235	200	8-19	20	400	200	485	207	125	235	215
150A	150	265	230	8-19	22	460	230	575	258	145	290	260
200A	200	320	280	8-23	24	550	275	665	320	170	350	320
250A	250	385	345	12-23	26	680	340	825	412	210	450	420
300A	300	430	390	12-23	28	760	380	920	473	235	515	480
350A	350	480	435	12-25	30	820	410	1030	529	265	575	535
400A	400	540	495	16-25	30	880	440	1135	595	300	645	595