


RATING	PSI	Kgf/cm ²
BODY	107 PSI	7.5 Kgf/cm ²
SEAT	71 PSI	5 Kgf/cm ²

RATING	PSI	Kgf/cm ²
BODY	341 PSI	24 Kgf/cm ²
SEAT	100 PSI	7 Kgf/cm ²

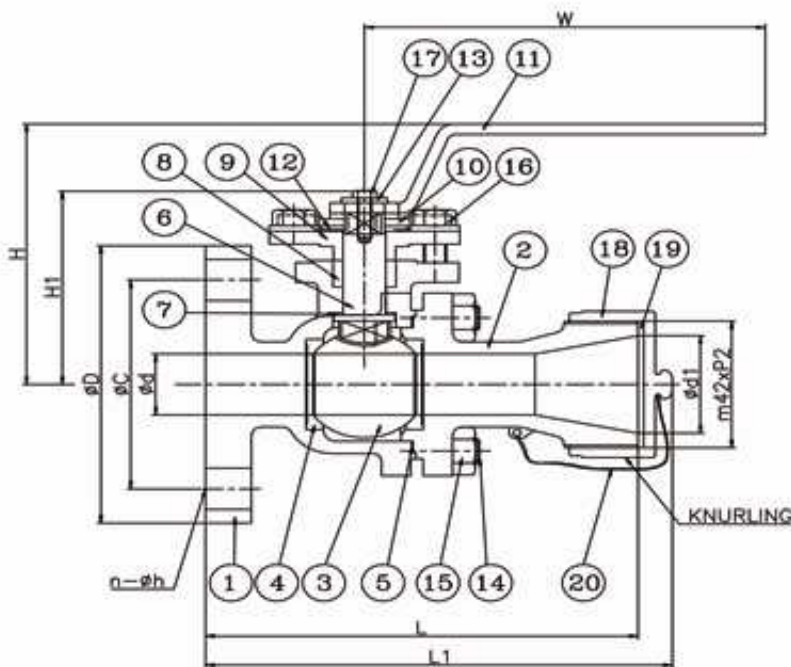

20	WIRE	SUS304
19	GASKET	RUB
18	COUPLING CAP	BC6 or BRASS
17	HEX BOLT	SUS304
16	HEX BOLT	SUS304
15	HEX NUT	SUS304
14	STUD BOLT	SUS304
13	WASHER	SUS304
12	WASHER	SUS304
11	LEVER	AL or SUS304
10	STOPPER	SUS304
9	GLAND	SUS304
8	V-PACKING	PTEF
7	PACKING	PTEF
6	STEM	SUS304
5	PACKING	PTEF
4	SEAT	PTEF
3	BALL	SCS13
2	CAP	BC6
1	BODY	BC6

DIMENSION

(Unit:mm)

SIZE	ød	FLANGE 5K FF				L	L1	H	H1	W	ød1	WT(Kg) /EA
		øD	t	øC	n-øh							
15A	15	80	9	60	4-12	110	130	80	60	142	32	2
25A	25	95	10	75	4-12	120	145	115	95	155	32	5

SIZE	ød	FLANGE 16K FF				L	L1	H	H1	W	ød1	WT(Kg) /EA
		øD	t	øC	n-øh							
15A	15	95	12	70	4-15	110	130	80	60	142	32	3
25A	25	125	14	90	4-19	120	145	115	95	155	32	6




RATING	PSI	Kgf/cm ²
BODY	270 PSI	19 Kgf/cm ²
SEAT	156 PSI	11 Kgf/cm ²



Notes

MAX. ALLOWABLE TEMP' TEFLON:160°C

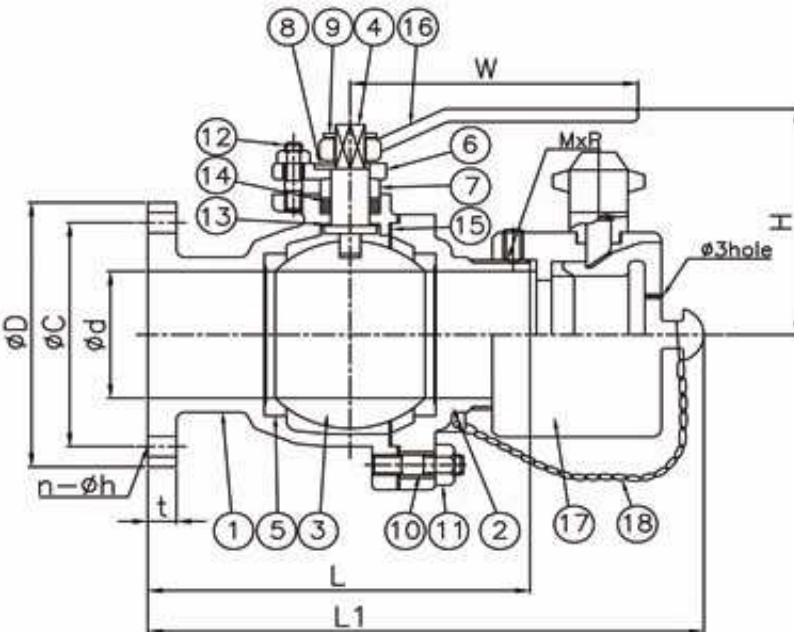

18	CHANGE	SUS304
17	BS336 COUPLING	BC6
16	HANDLE	JIS G 5501-FC200
15	GKSET	TEFLON
14	PACKING	TEFLON
13	THRUST PACKING	TEFLON
12	STUD BOLT/NUT	SUS304
11	NUT	SUS304
10	STUD BOLT	SUS304
9	SNAP RING	SUP
8	STOPPER	JIS G 3101-SS400
7	GLAND RING	JIS H 3250-C3604
6	GLAND PLATE	JIS H 5111-BC6
5	SEAT RING	TEFLON
4	STEM	JIS H 3250-C3771 BD
3	BALL	JIS H 5111-BC6
2	BONNET	SC480
1	BODY	SC480

DIMENSION

(Unit:mm)

SIZE	ød	FLANGE JIS 16K FF				L	L1	H	W	MxP	WT(Kg) /EA
		øD	øC	n-øh	t						
50A	50	155	120	8-19	16	178	248	120	230	M64xP2	16.3
65A	65	175	140	8-19	18	190	260	160	230	M80xP2	27.9